For use to 6 in. w.g. of static pressure

Standard Materials and Construction

FRAME: 15%" x 61/2" x 15%" extruded aluminum channel frame with a

.080" thick (nominal) aluminum transition piece.

BLADE: Extruded aluminum, airfoil design.

DRIVE SHAFT: ½" dia.aluminum shaft, extended 7 inches beyond frame.

BEARINGS: Double-sealed.

LINKAGE: In jamb, out of air stream.


FINISH: Mill.


Notes


- 1. 1/4" nominal deduction will be made to the opening size given.
- 2. Please specify blade position: Parallel or Opposed.
- 3. Approximate shipping weight is 7 lbs./sq.ft.

Damper Sizes


Min Size	Max Size			
10"W x 10"H	60"W x 60"H			

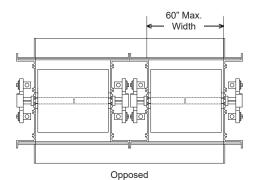

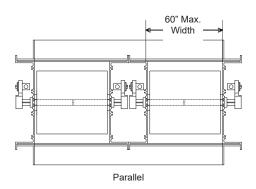

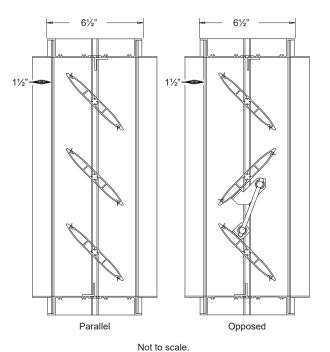

Page 1

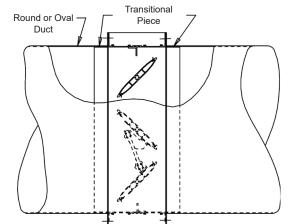

Transition Piece Detail

	ļ									
H #	Qty	Width	Height	Parallel	Opposed	Round	Oval			NAL 19
Item #		Damper Size (in.)		Blade Position		Transition Type				<u>Union Made</u>
Arch.	/ Eng.:			EDR:		ECN:		Job:		
Cont	ractor:									
Р	roject:			Date:		DWN:		DWG:		



Damper