

MODEL AA2M

Smoke Damper • Airfoil Blades • Leakage Class II • 250°F Rated • Galvanized Steel • For Volume Control Applications

Standard Materials and Construction

FRAME:	5½" x ¾" x 16 GA. galvanized steel hat channel. A flat head and sill are used for sizes up to 13" high.
BLADES:	20 GA. galvanized steel double skinned (equal to 14-GA), parallel action.
AXLES:	Plated solid steel stub.
BEARINGS:	Oil impregnated bronze.
LINKAGE:	Plated steel angle and crank plates with stainless steel pivots, in-jamb type.
STOPS:	18 GA. galvanized steel at head and sill.
BLADE SEALS:	Silicone.
JAMB SEALS:	Stainless steel.
SLEEVE:	Minimum 20 GA. galvanized steel by 18" long.
CAULKING:	Hardcast Iongrip 601 or UL-listed equivalent.
FINISH:	Mill on galvanized steel.
ACTUATOR:	24VAC/DC Electric: factory-installed for power-open/spring-close (fail close) operation. External left-hand mounted as viewed from jackshaft side of damper.

Options

Exact Size (no undercut)
 Flange - Front, Rear or Both
 Right Hand and/or Internal Actuator Mounting Locations (restrictions apply)
 Dual Position Indication (IDPI) Switches
 Model SM-501 Flow-Rated Smoke Detector
 Model 2151 No-Flow Smoke Detector (12" minimum damper height)
 Remote test box
 Momentary test switch
 Transformers
 Tab-Lock retaining angles - 1 or 2 sets
 Stainless steel bearings
 Stainless steel axles
 Security bars
 Sleeves of various depths and gauge thickness (restrictions apply)
 No sleeves or side plates only (restrictions apply)
 Round or oval transitions
 Short-width (less than 8") and/or short-height (less than 6") transitions

Notes

- Nominal deductions will be made to the opening size given.
- Dampers greater than or equal to 12" in height with factory mounted SM-501 smoke detectors require a minimum 19" deep sleeve (10½" on the actuator side). Detectors will be mounted on the side of the damper opposite actuator.
- Dampers less than 12" in height with factory mounted SM-501 smoke detectors require a minimum 20" deep sleeve (11½" on the actuator side). Detectors will be mounted on the bottom or top of damper.
- Smoke detectors can be ordered for field mounting with standard 18" deep sleeve.
- Actuator control signal is 2-10 VDC or with addition of 500 ohm resistor (by others) is 4-20 mA.
- Unless ordered with a smoke detector, the 3" sleeve setback on the non-jackshaft side will increase when sleeve lengths greater than 18" are ordered. Custom non-jackshaft side setback dimensions must be specified on order. When ordered with a smoke detector, additional sleeve length is added to jackshaft side. If ordered with smoke detector and additional sleeve length (beyond requirements of notes 2 and 3), additional sleeve length will be added to jackshaft side unless custom setback dimension is otherwise specified on order.

Damper Sizes


Damper Style	Temp Rating	Velocity & Pressure	Horizontal and Vertical Min Panel	Horizontal and Vertical Max Panel	Horizontal and Vertical Max Assembly
No Transition	250°F	2000 FPM, 4 in. w.g.	8" x 6" frame	22" x 22" frame	96" x 48" frame
C-Round -or- C-Square			4" dia. duct -or- 4" x 4" duct (8" x 6" frame)	22" dia. duct -or- 22" x 22" duct	46" dia. duct -or- 46" x 46" duct
C-Oval -or- C-Rectangular			4" dia. duct (8" x 6" frame)	22" x 22" duct	94" x 46" duct

All dimensions are shown as width x height.

For dampers with no transition, the order size will equal frame size, which should equal duct size.


Unless notes, duct size will be the order size.

For dampers with transitions, the damper's frame size will equal the order width + 2 inches x the order height plus 2 inches.

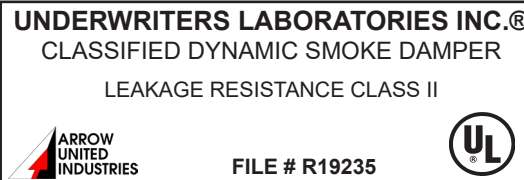

This smoke damper meets the construction and performance requirements of:

- Underwriters Laboratories Inc. Standards 555S
- National Fire Protection Association Standards 80, 90A, 92, 101, 105
- ICC's International Building Code
- New York City MEA Listing #112-99-M
- California State Fire Marshal Listing #3230-1328:111
- Underwriters Laboratories Inc. Approved for dual direction airflow and dynamic conditions.
- Underwriters Laboratories Inc. Classified for use in smoke control systems for Leakage Class II and 250°F.
- Actuators must be controlled by a smoke detection system.

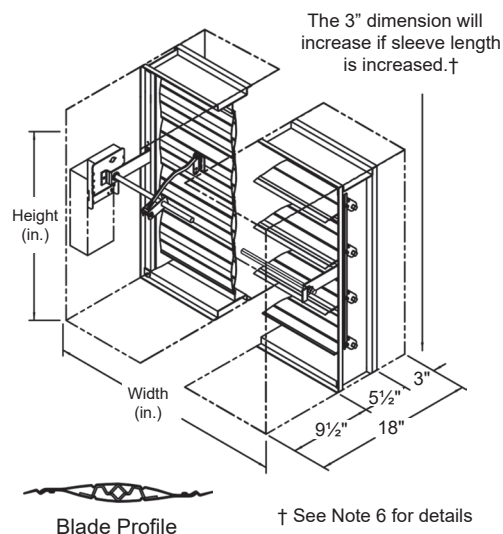

When using a true 6" high damper, width is limited to 16". If damper is ordered as 6" high and width is less than 16", an 8" high damper with 2" short-height transition will be supplied.

MODEL AA2M

Smoke Damper • Airfoil Blades • Leakage Class II • 250°F Rated • Galvanized Steel • For Volume Control Applications

Operational Rating

Maximum Differential Pressure: 4 in. w.g.

Maximum Velocity: 2000 fpm

Leakage Rating


UL Class II

10 cfm per sq. ft. maximum @ 1 in. w.g.

20 cfm per sq. ft. maximum @ 4 in. w.g.

Pressure Drop Rating


The pressure drop data shown below is based on laboratory conditions. The test setup does not take into account elbows or other duct fittings that are part of every actual duct system. The configuration of the actual duct system immediately upstream and downstream of the damper often contributes more pressure loss than the damper itself.

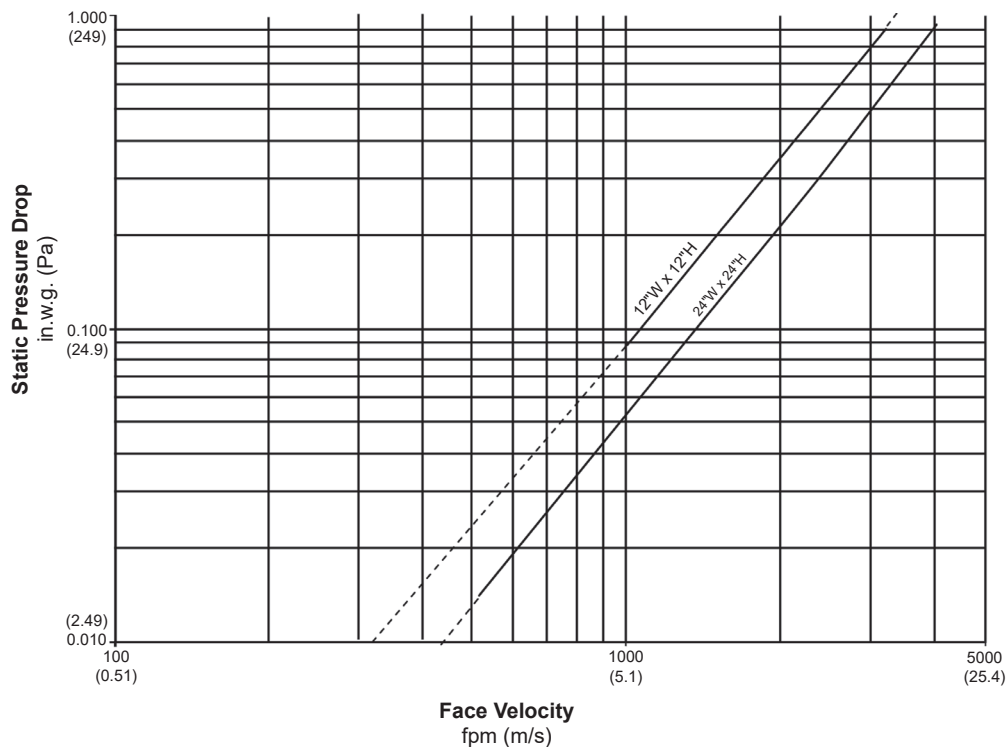

Tested in accordance with AMCA Standard 500D, Figure 5.3
Intake air converted to standard air density.



Arrow United Industries certifies that the AA2M damper shown here is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to Air Performance Ratings only.

										
Item #	Qty	Damper Size	Horizontal	Vertical	250°F	Velocity	Pressure			
			Orientation		Temp. Rating	Operational Rating		Union Made		
Arch. / Eng.:					EDR:		ECN:		Job:	
Contractor:										
Project:					Date:		DWN:		DWG:	