# **MODEL EAC - ESC**

#### Equipment Support • Standard Cant • Aluminum or Steel

Page 1

# Standard Materials and Construction

### Formed Aluminum Equipment Support

# SHELL &

| BASEPLATE:                          | .063" thick (nominal) aluminum alloy 3003-H14. All seams are fully welded and sprayed with protective coating. |  |  |  |  |  |  |
|-------------------------------------|--|--|--|--|--|--|--|
| CANT:                               | Mitered 3" x 3" integral cant.   |  |  |  |  |  |  |
| <b>REINFORCEMENTS:</b>              | On 12" centers.  |  |  |  |  |  |  |
| NAILER:                             | Varies by width, factory installed.  |  |  |  |  |  |  |
| FINISH:                             | Mill.  |  |  |  |  |  |  |
| Formed Steel Curb Equipment Support |  |  |  |  |  |  |  |
| SHELL &                             |  |  |  |  |  |  |  |
| BASEPLATE:                          | 18 GA. galvanized steel. All seams are fully welded and sprayed with protective coating.                       |  |  |  |  |  |  |

**CANT:** Mitered 3" x 3" integral cant.

- **REINFORCEMENTS:** On 12" centers.
  - **NAILER:** Varies by width, factory installed.
    - FINISH: Mill.

#### **Options**

Aluminum Material - Available in .081" - .125" thick 3003-H14 alloy Steel Material - Available in various gauges of galvanized, galvaneal or stainless

**Pitched or Peaked** - In conjunction with the overall dimensions, both the height rise, specified in linear inches per foot (ex: 3" in 12") and the direction of the pitch must be specified.

**Counterflashing** - A removable metal cap fabricated of the same material as the equipment support provides for an effective method of attaching roofing felts.

**Gasket** -  $\frac{1}{4}$ " thick polyurethane foam gasket can be installed, lining the entire top perimeter. Gasket can be used in place of, or in addition to a wood nailer.

**Finishes** - A wide selection of finishes include baked enamel, epoxy, or prime coat.


# <u>Notes</u>

1. "A" and "B" are opening dimensions.

2. If height or width exceed 90", multi-section construction may be required.

### Equipment Support Width

| Nominal<br>Width | Actual Nailer<br>Width |  |  |  |  |  |
|------------------|------------------------|--|--|--|--|--|
| 4"               | 31⁄2"                  |  |  |  |  |  |
| 6"               | 51⁄2"                  |  |  |  |  |  |
| 8"               | 71⁄2"                  |  |  |  |  |  |
| 10"              | 9½"                    |  |  |  |  |  |
| 12"              | 11½"                   |  |  |  |  |  |

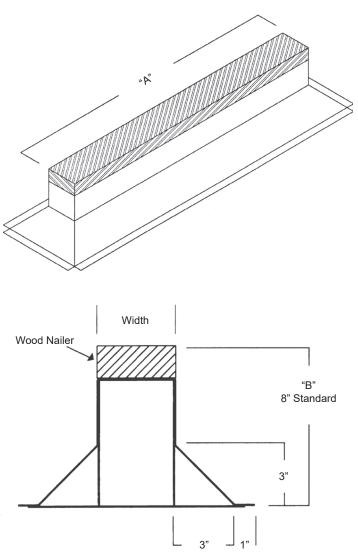

| Here # | Qty        | <i>``</i> А″       | "В″ | Wic   | dth | Aluminum | Steel | Height Rise  | Direction | U.U.       |  |
|--------|------------|--------------------|-----|-------|-----|----------|-------|--------------|-----------|------------|--|
| Item # |            | Opening Dimensions |     |       |     | Material |       | Pitch / Peak |           | Union Made |  |
| Arcl   | h. / Eng.: |                    |     | EDR:  |     | ECN:     |       | Job:         |           |            |  |
| Co     | ntractor:  |                    |     |       |     |          |       |              |           |            |  |
|        | Project:   |                    |     | Date: |     | DWN:     |       | DWG:         |           |            |  |



In the interest of product development, Arrow United reserves the right to make changes without notice.