

MODEL CAE - CSE

Roof Curb Extension • Aluminum or Steel

Standard Materials and Construction

Formed Aluminum Curb Extension

SHELL &

BASEPLATE: .063" thick (nominal) aluminum alloy 3003-H14. All seams are fully welded and sprayed with protective coating.


FINISH: Mill.

Formed Steel Curb Extension

SHELL &

BASEPLATE: 18 GA. galvanized steel. All seams are fully welded and sprayed with protective coating.

FINISH: Mill.

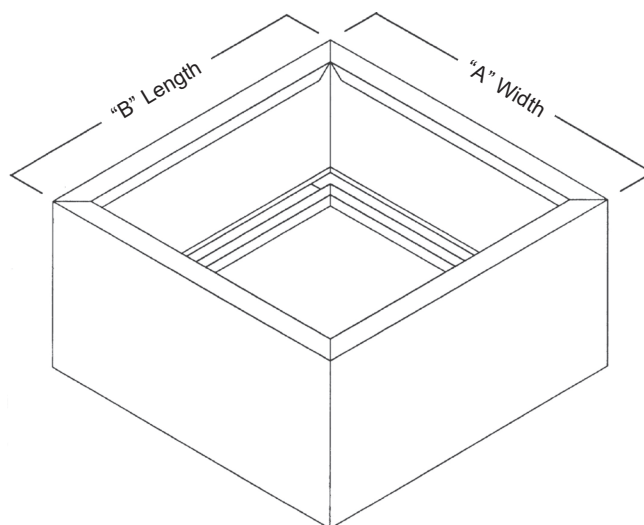

Options

Aluminum Material - Available in .081" - .125" thick 3003-H14 alloy.

Steel Material - Available in various gauges of galvanized, galvaneal or stainless.

Platform Cap - A 3/4" plywood top with a metal cap fabricated of the same material as the product.

Wood Nailer - Factory installed wood nailer for equipment mounting is mechanically fastened to top perimeter.

Gasket - 1/4" thick polyurethane foam gasket can be installed, lining the entire top perimeter.


Insulation - Available with 1" or 2" semi-rigid insulation.


Access Panels - To provide a passageway to internal equipment, an access opening is cut and lined with a protective vinyl edge seal and the cover panel is mechanically fastened over the opening. Minimum height restrictions apply.

Louvered Vents - Provides airflow through the curb. Units are available with 6"W x 7/8"H louvered vents, with 4 per side. Minimum height restrictions apply. Finishes - A wide selection of finishes include baked enamel, epoxy, or prime coat. Aluminum curb finishes include Kynar, clear or color anodize.

Notes

1. "A" width, "B" length and "C" height are outside dimensions.
2. If height or width exceed 90", multi-section construction may be required.

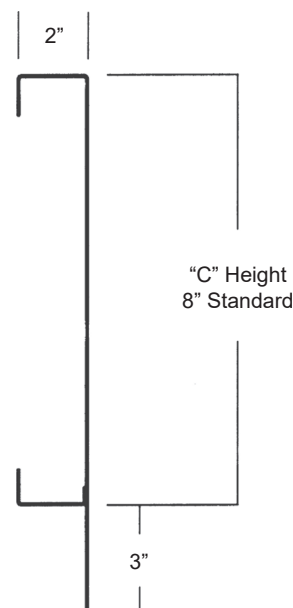

									
Item #	Qty	Width	Length	Height	Aluminum	Steel	Height Rise	Direction	
Opening Dimensions					Material		Pitch / Peak		Union Made
Arch. / Eng.:				EDR:		ECN:		Job:	
Contractor:									
Project:				Date:		DWN:		DWG:	